



CAN-AQUA
INTERNATIONAL


CA-SH354 (30 USGPM)

RECESSED COPOLYMER POLYPROPYLENE OIL INTERCEPTOR



TAG

Project:
Contractor:

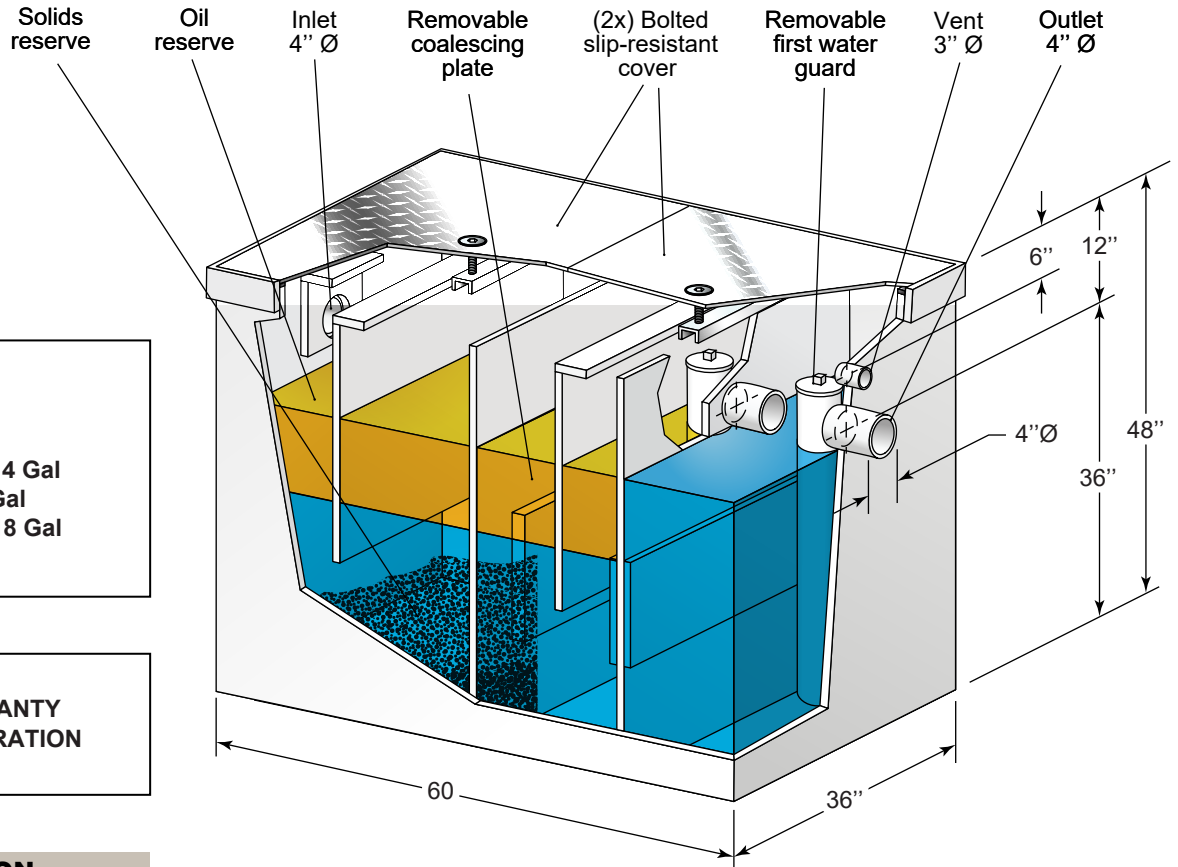

CAPACITIES

Used oil capacity: 114 Gal
Solids capacity: 74 Gal
Nominal capacity: 318 Gal

**25 YEAR WARRANTY
AGAINST PERFORATION**

DESCRIPTION

Copolymer polypropylene oil interceptor, capacity of 30 USGPM [114 L/min]. Includes 114 US gal used oil reserve, 75 US gal solids reserve, inlet flow regulator, removable baffles, fixed baffles with removable coalescing plates, water seal equipped with a cleanout, and (2x) 1/4 in. thick slip-resistant aluminum covers with sealing gaskets.

OPTIONS

- ☐ **SS** Stainless steel cover type 304
- ☐ **CR** Reinforced aluminum cover (1/2" thick)
- ☐ **CRG** Reinforced galvanized steel cover (1/2" thick)
- ☐ **CES** Cover frame with high quality seal
- ☐ **RS** Raccord de soutirage
- ☐ **RS2** 2 Suction connections
- ☐ **DH** Oil detector and control panel
- ☐ **DH-CS** Oil detector with dry contact

