


CA-190-HYP-36-I5









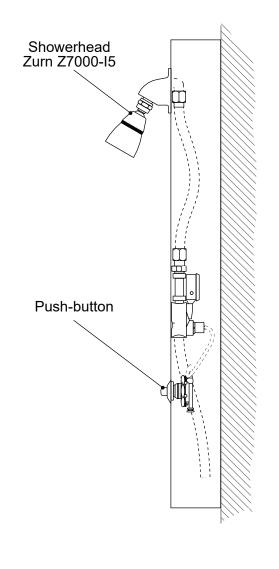

DESCRIPTION

Metering push-button shower system with stainless steel casing and cover, type 304, 16 gauge, #4 satin finish. Includes a pneumatic valve with a forged brass body and stainless steel seat, a screwdriver-operated service stop valve with a built-in filter, and a chrome-plated brass push-button actuator mounted on the front panel. Features an automatic shut-off with an adjustable cycle of 20 to 2 minutes. The faceplate is made of 18 gauge polished satin finish stainless steel and secured with vandal-resistant stainless steel screws. Overall: 914 x 178 x 95 mm (36 x 7 x 3¾ in).

OPTIONS

☐ 1.5 With 1.5 GPM flow rate (WaterSense - EPA)



Meets standards: ASME A112.18.1 ASME A112.18.11 (2012) CSA B125.1 (2005) CSA B125.1 (2012)

CONTACT US FOR A CUSTOM ELONGATED FABRICATION TO CONCEAL THE EXISTING EXPOSED PIPING

