


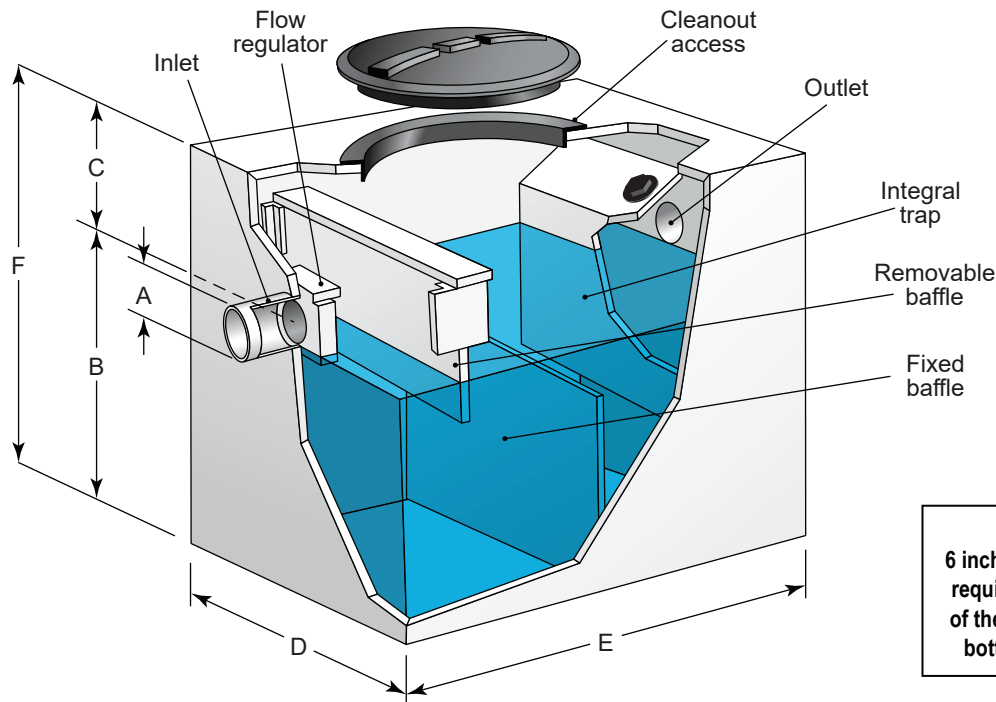

Models	Capacity Guspm [LPM]	Grease Capacity LB [kg]	Wall Thickness in [mm]	Access cleanout Qty Diam. in [mm]	A Inlet and outlet	B Bottom to center in [mm]	C * Center to top in [mm]	D Width in [mm]	E Length in [mm]	F * Height in [mm]	ETL Intertek
CA-SG10-S	10 [38]	20 [9.0]	1/2 [13]	1 8 [203]	DN 2 po	8 1/2 [216]	6 [152]	14 [356]	17 [432]	14 1/2 [368]	Meets standards
CA-SG15-S	15 [57]	30 [13.6]	1/2 [13]	1 12 [305]	DN 2 po	10 [254]	6 [152]	17 [432]	19 [483]	16 [406]	
CA-SG20-S	20 [76]	40 [18.1]	1/2 [13]	1 12 [305]	DN 3 po	12 [305]	6 [152]	20 [508]	24 [610]	18 [457]	
CA-SG25-S	25 [95]	50 [22.7]	1/2 [13]	1 12 [305]	DN 3 po	14 [356]	6 [152]	20 [508]	24 [610]	20 [508]	
CA-SG35-S	35 [132]	70 [31.7]	1/2 [13]	1 16 [406]	DN 4 po	15 [381]	6 [152]	25 [635]	28 [711]	21 [533]	
CA-SG50-S	50 [189]	100 [45.3]	1/2 [13]	1 16 [406]	DN 4 po	17 [432]	6 [152]	25 [635]	28 [711]	23 [584]	
CA-SG75-S	75 [284]	150 [67.5]	3/4 [19]	1 21 [533]	DN 4 po	19 [483]	6 [152]	29 [737]	31 [787]	25 [635]	
CA-SG100-S	100 [378]	200 [90.0]	3/4 [19]	1 21 [533]	DN 4 po	23 [584]	10 [254]	34 [864]	43 [1092]	33 [838]	**
CA-SG150-S	150 [568]	300 [135]	3/4 [19]	2 21 [533]	DN 4 po	25 [635]	10 [254]	42 [1067]	56 [1422]	35 [889]	
CA-SG200-S	200 [757]	400 [181]	3/4 [19]	2 21 [533]	DN 4 po	30 [762]	10 [254]	44 [1118]	61 [1549]	40 [1016]	
CA-SG250-S	250 [946]	500 [227]	3/4 [19]	2 21 [533]	DN 4 po	36 [914]	10 [254]	52 [1321]	71 [1803]	46 [1168]	
CA-SG300-S	300 [1136]	600 [272]	3/4 [19]	2 21 [533]	DN 6 po	39 [990]	10 [254]	53 [1346]	76 [1930]	49 [1245]	

Note: Larger capacity available on request. *Dimension "C" can vary according to needs and dimension "F" will be modified in consequence.

** CSA B481 approval is not necessary for models with more than 100 gallons per minute (GPM)

DESCRIPTION

Polypropylene grease interceptor for above ground installation, including a removable baffle and flow regulator to facilitate cleaning, integral trap with cleanout plug, fixed baffle retaining solids, cover with stainless bolt, sealing liner and rapid access cleanout.

OPTIONS

- | | |
|---|---|
| ☐ DG Grease detecting system with control panel (not available for SG10, 15 & 20) | ☐ RS Suction connection |
| ☐ DG-CS Dry contact grease detecting system (not available for SG10, 15 & 20) | ☐ RS(2) 2 Suction connections |
| ☐ SBG Grease biodegradation system | ☐ PS Sediment bucket |