



CAN-AQUA
INTERNATIONAL

CA-SH484 (75 USGPM)

RECESSED COPOLYMER POLYPROPYLENE OIL INTERCEPTOR



TAG

Project:
Contractor:

CAPACITIES

Used oil capacity: 166 Gal
Solids capacity: 99 Gal
Nominal capacity: 508 Gal



**25 YEAR WARRANTY
AGAINST PERFORATION**

DESCRIPTION

Copolymer polypropylene oil interceptor, capacity of 75 USGPM [284 L/min]. Includes 166 US gal integrated used oil reserve, 99 US gal solids reserve, inlet flow regulator, removable baffles, fixed baffles with removable coalescing plates, water seal equipped with a cleanout, and two 1/4" thick slip-resistant aluminum covers with sealing gaskets.

OPTIONS

- ☐ **SS** Stainless steel cover type 304
- ☐ **CR** Reinforced aluminum cover (1/2" thick)
- ☐ **CRG** Reinforced galvanized steel cover (1/2" thick)
- ☐ **CES** Cover frame with high quality seal
- ☐ **RS** Raccord de soutirage
- ☐ **RS2** 2 Suction connections
- ☐ **DH** Oil detector and control panel
- ☐ **DH-CS** Oil detector with dry contact

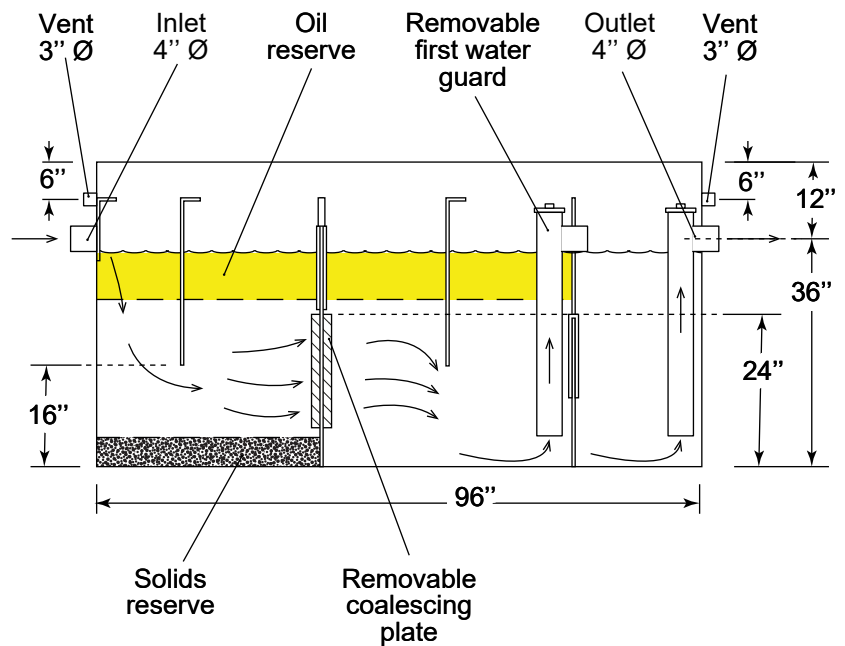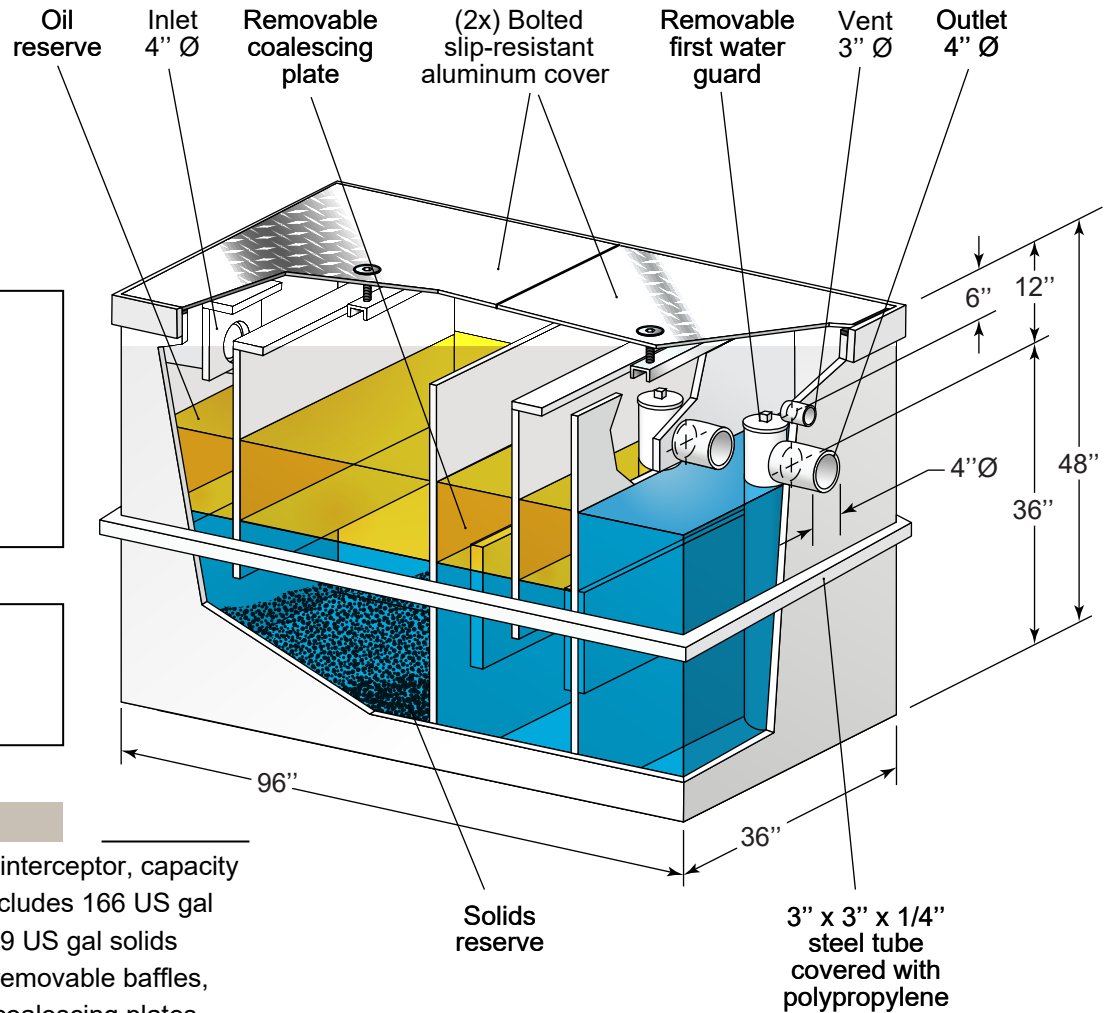

www.can-aqua.ca

T : 1 866 625 3088 | F : 450 625-8617

