

Project:
Contractor:


2" NPT
Full coupling
with ABS plug

Vent
3" Ø

CAPACITIES

Used oil capacity: 200 Gal
Solids capacity: 84 Gal
Nominal capacity: 740 Gal

**25 YEAR WARRANTY
AGAINST PERFORATION**

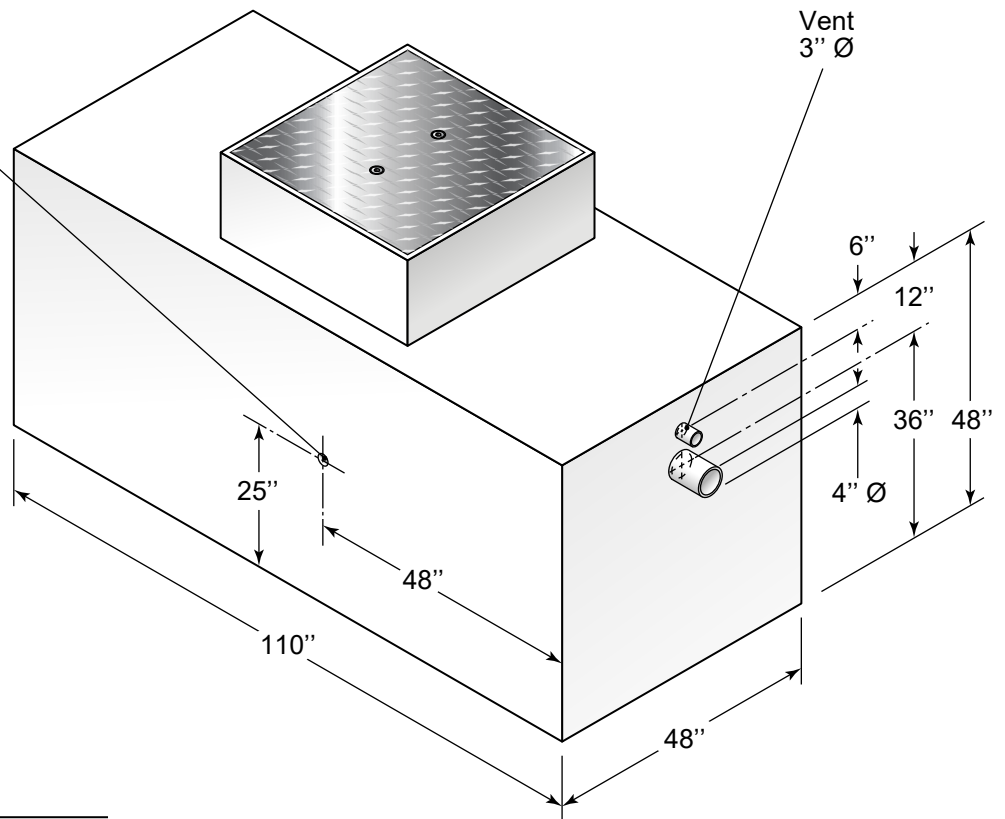


DESCRIPTION

Copolymer polypropylene oil interceptor (3/4" thickness), capacity of 150 USGPM [570 L/min], integrated used oil reserve of 200 US gal, solids reserve of 84 US gal, removable baffle, fixed baffle with removable coalescing plate, water seal equipped with a cleanout, (2x) 3" Ø vents, and (2x) 1/4" thick slip-resistant aluminum covers with sealing gaskets.


OPTIONS

- ☐ **SS** Stainless steel cover type 304
- ☐ **CR** Reinforced aluminum cover (1/2" thick)
- ☐ **CRG** Reinforced galvanized steel cover (1/2" thick)
- ☐ **CES** Cover frame with high quality seal
- ☐ **RS** Raccord de soutirage
- ☐ **RS2** 2 Suction connections
- ☐ **DH** Oil detector and control panel
- ☐ **DH-CS** Oil detector with dry contact

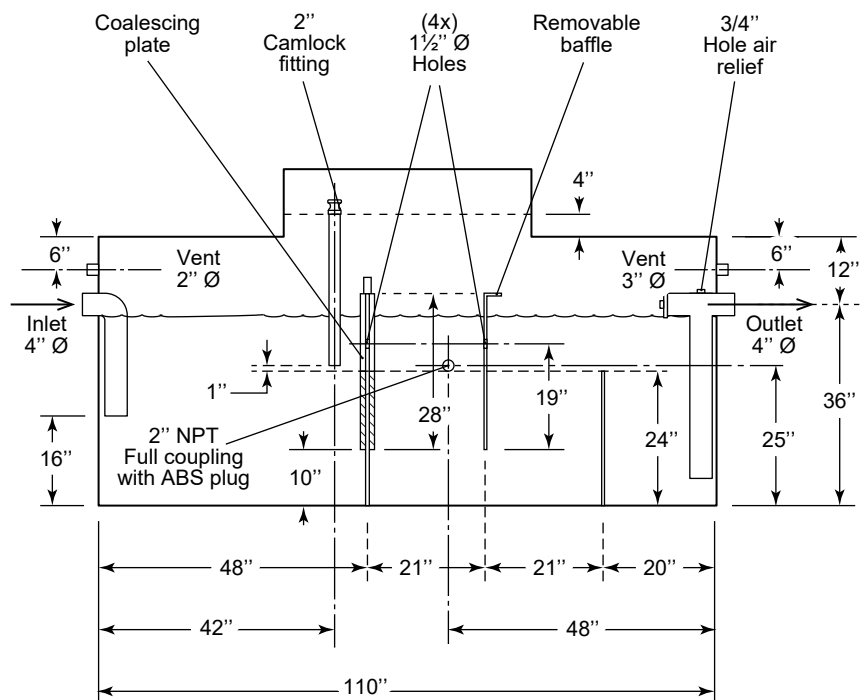

Project:
Contractor:

REMOVABLE BAFFLE

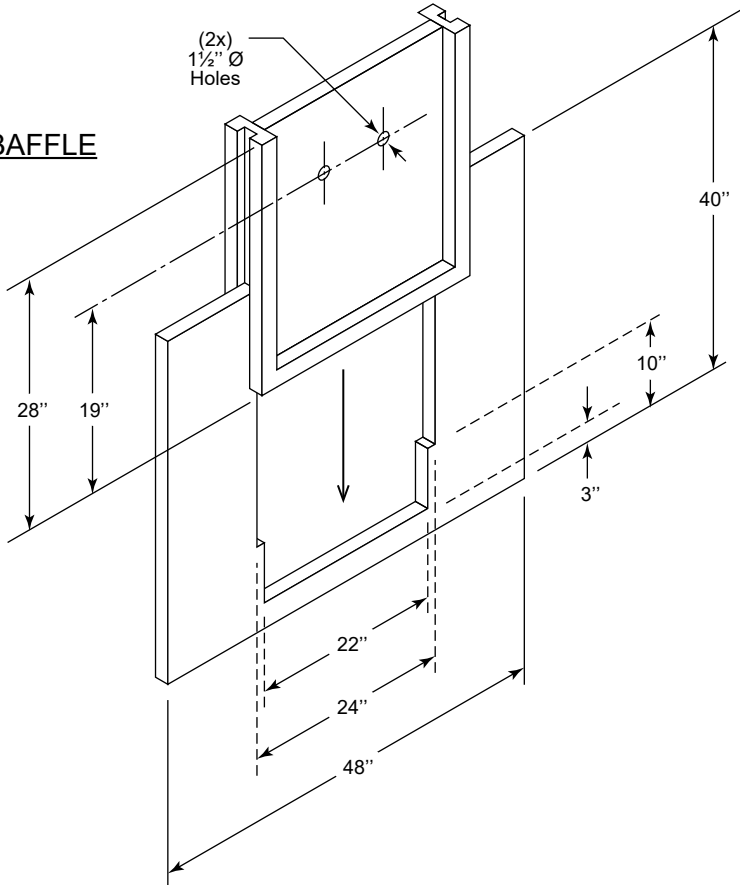

COALESCING PLATE

