

DESCRIPTION

Recessed polypropylene grease interceptor including a removable baffle and a flow regulator, integral trap with cleanout plug, fixed baffle retaining solids, bolted slip-resistant aluminium cover with neoprene gasket.

OPTIONS


☐ CS Dry contact

CARACTERISTICS

- Transmission: 100 meters (330 feet) max.
- 4 stainless steel probes.
- Dimensions: 6 x 6 x 6" (152 x 152 x 152 mm).
- Adjustment and indication of high, low, and overflow levels.
- Power supply model 110/115 VAC, 50/60Hz, 20 A.
- Environment: 0 to 50°C (32 to 122°F); RH max 85% non-condensing.

INSTALLATION GUIDE

- Pre-drill the (3) holes on the wall to screw the bracket of the probe support, so that the under-side is at the height of dimension C.
- Cut the first probe to dimension G and screw onto the connector identified COMM.
- Cut the second probe to dimension F and screw onto the support.
- Cut the third probe to dimension E and screw onto the support.
- Cut the fourth probe to dimension D and screw onto the support.

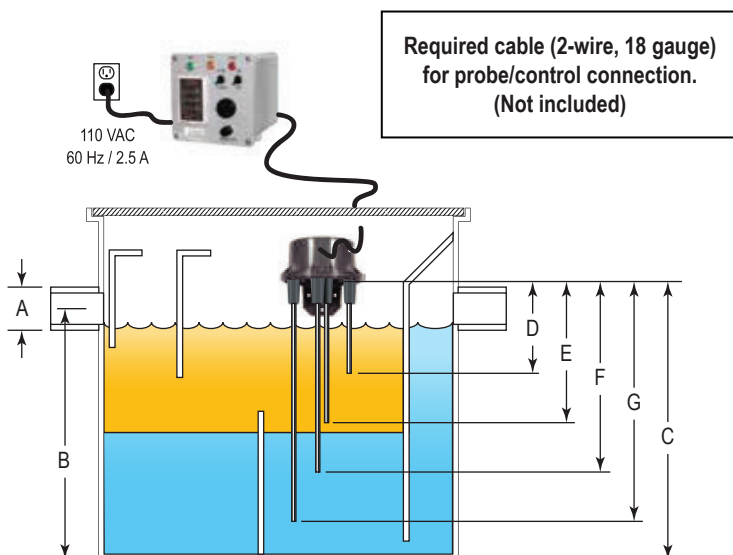

MAINTENANCE

- The interceptor requires draining of grease as needed, performed by a specialized company.
- Once drained, it is the responsibility of the owner or user to fill the separator with clean water up to the invert before the first use.
- The draining frequency cannot be estimated; it varies depending on each application.

Note:

A preventive cleaning is suggested
1 to 2 times per year or as needed.

Models	A	B	C	D	E	F	G
CA-SG25	3"	14"	16"	6"	8"	10"	12"
CA-SG35	4"	15"	17"	6"	8"	10"	12"
CA-SG50	4"	17"	19"	6"	8"	12"	14"
CA-SG75	4"	19"	21"	6"	9"	13"	15"
CA-SG100	4"	23"	25"	6"	10"	14"	17"
CA-SG150	4"	25"	27"	6"	12"	17"	19"
CA-SG200	4"	30"	32"	6"	12"	18"	19"
CA-SG250	4"	36"	38"	6"	12"	18"	19"